

RAC-1E-F02

Applications

Firewall / VPN

Telephony / Telecom / VoIP


Network / Security Appliance

Military Application



Features & Benefits

- 1 Power on/off, system reset and LEDs for HDD & LAN
- 2 Front-facing motherboard I/O for easy maintenance
- 3 Front-facing expansion slot for easy maintenance
- 4 Two(2) internal 3.5-inch HDD supported
- 5 One(1) 97mm rear blower for optimized cooling [optional three(3) 40mm rear fans]
- 6 1U form factor power supply

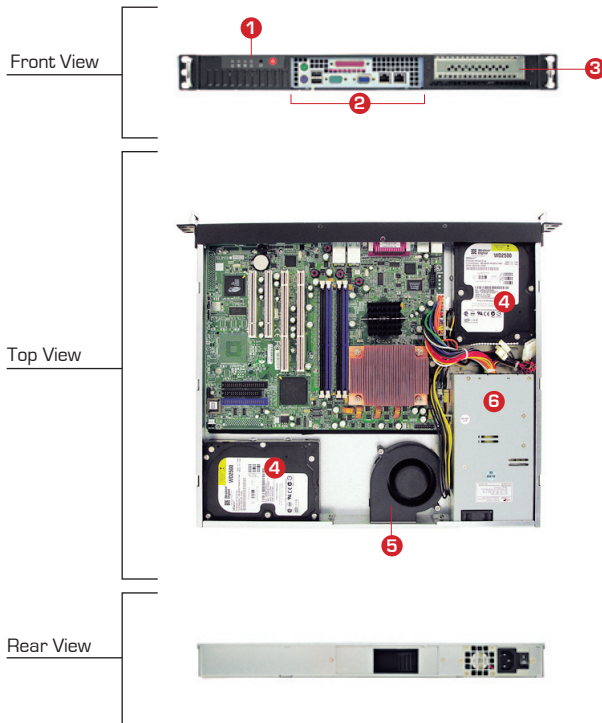

RAC-1E-F02

| | |
|--|---|
| Model Number : RAC-1E-F02 | |
| Order Information : RAC-1E-●-F02 | |
| Industry Standard : EIA-RS310D | |
| Materials: Heavy-duty preplated SPGC cold-rolled steel | |
| Finish : | Outside / Front : Texture-coated on front panel |
| Dimensions : (W x D x H) | mm : 482.6 x 376 x 44.4 |
| | inches : 19 x 15 x 1.75 |
| Cooling : | Rear : 1 x 92mm blower (or 3 x 40x56mm fans) |
| Power Supply : | ● Descriptions |
| | 25X 250W ATX PFC 30X 300W ATX PFC |
| Expansion : 1 x PCI slot via riser card (full height, half length) | |
| Controls : Power on/off and system reset | |
| Indicators : Power, 2 x LAN, and HDD LED | |
| System Board : Up to 12"(W) x 9.6"(D) ATX compliant M/B | |

| | | | |
|---------------------------------------|---------------------|----------------------|---|
| Drive Bay : | External | 5.25" | 0 |
| | | 3.5" | 0 |
| | | 3.5" hot-swap | 0 |
| | | 2.5" hot-swap | 0 |
| Internal | 3.5" HDD bay | 2 | |
| | Slim CD-Rom/DVD-Rom | 0 | |
| | Slim FDD | 0 | |
| Temperature : 0°C(32°F) ~ 50°C(122°F) | | | |
| Humidity : 5%~95% non-condensing | | | |
| Gross Weight : 7 kgs / 15.4 lbs | | | |
| Packaging Dimension (W x D x H) : | | mm : 551 x 561 x 158 | |
| Cubic Feet : 1.72 | | | |
| Riser Card Options : | RCD-1U1PCI32R | RCD-1U1PCI32RIB | |
| | RCD-1U1PCI64 | RCD-1U1PCI64RIB | |
| Mounting Options: | FRR-1U20-CR | FRR-1U26-C-R | |

Note: Please contact our sales rep for MB I/O shield option

Mechanical Drawing

