

RMC-1A-2

Applications

Firewall / VPN

Telephony / Telecom / VoIP

Network / Security Appliance




Features & Benefits

- 1 Power on/off, system reset and HDD LEDs
- 2 Front access dual USB ports
- 3 Four(4) fans for optimized cooling
- 4 One(1) internal 3.5-inch HDD supported
- 5 1U ATX form factor power supply
- 6 One(1) slot via riser card

Front View



Top View

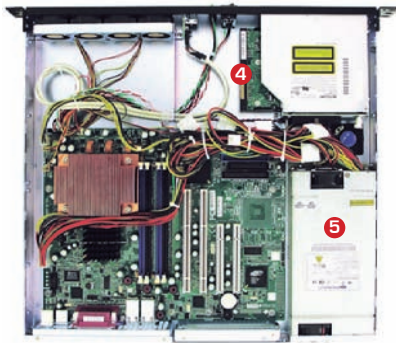

Rear View



Model Number : RMC-1A-2	
Order Information : RMC-1A-●-2	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 406.4 x 44.4
	inches : 19 x 16 x 1.75
Cooling :	Front: 4 x 40x28mm fans
Power Supply :	● Descriptions
	20X 200W ATX
	25X 250W ATX PFC
	30X 300W ATX PFC
	30E 300W EPS-12V PFC
Expansion : 1 x PCI slot via riser card (full height)	
Controls : Power on/off, system reset and 2 x USB ports	
Indicators : Power and HDD LEDs	
Speakers : 0.4W built-in	
System Board : Up to 12"(W) x 10.5"(D) ATX/SSI CEB compliant M/B	

Drive Bay :	External	5.25"	0
		3.5"	0
		3.5" hot-swap	0
	Internal	2.5" hot-swap	0
		3.5"	1
Slim CD-Rom/DVD-Rom		1	
Slim FDD		0	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 7 kgs / 15.4 lbs			
Packaging Dimension (W x D x H) :		mm : 550 x 560 x 160	
Cubic Feet : 1.8			
Reference Container Loading :	20'	560	
	40'	1166	
	40' H	1340	
Riser Card Options :	RCD-1U1PCI32R	RCD-1U1PCI32RIB	
	RCD-1U1PCI64	RCD-1U1PCI64RIB	
Mounting Options :	BKT-1A-627-96020-G	BKT-1U-427-96010-G	
	FRR-1U20-CR	FRR-1U26-C-R	

Note: Please contact our sales rep for MB I/O shield option

Mechanical Drawing

