


RMC-1B-2

Applications
Firewall / VPN
Telephony / Telecom / VoIP
Network / Security Appliance
Military Application

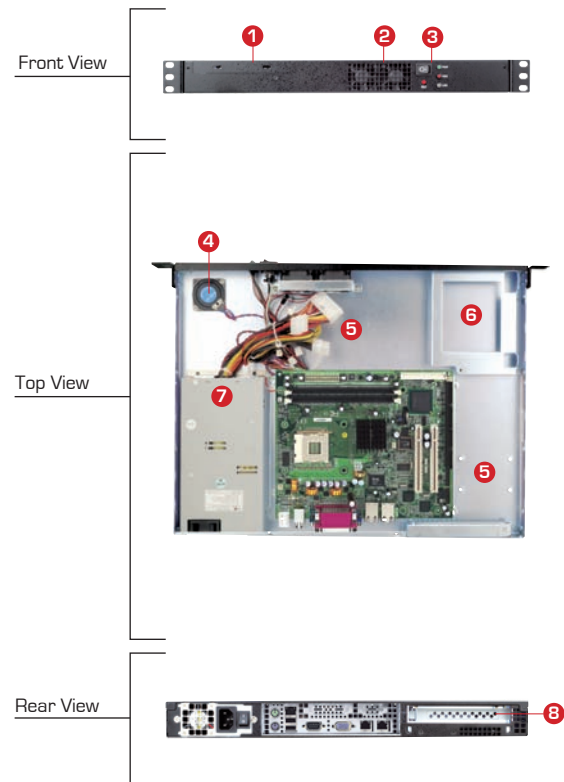

Features & Benefits

- 1 One(1) external slim CD-ROM supported
- 2 Two(2) front fan for optimized cooling
- 3 Power on/off, system reset and LEDs for HDD & LAN
- 4 Built-in speaker
- 5 Two(2) internal 2.5-inch HDD supported
- 6 One(1) internal 3.5-inch HDD supported
- 7 1U form factor power supply
- 8 One(1) PCI slot via riser card

BTO Built-to-Order (BTO) : Minimum Order Quantity (MOQ) 100

Model Number : RMC-1B-2

Order Information : RMC-1B-2

Industry Standard : EIA-RS310D

Materials : Heavy-duty cold-rolled steel

Finish : Inside / Body : Zinc-plated with bright chromate
 Outside / Front : Texture-coated

Dimensions : mm : 482.6 x 330.1 x 44.4
 (W x D x H) inches : 19 x 13 x 1.75

Cooling : Front: 2 x 40x28mm fans

	●	Descriptions
Power Supply :	20X	200W ATX
	25X	250W ATX PFC
	30X	300W ATX PFC

Expansion : 1 x PCI slot via riser card

Controls : Power on/off and system reset

Indicators : Power, LAN and HDD LEDs

Speakers : 0.4W built-in

System Board : Up to 9"(W) x 7.5"(D) FlexATX and 7" x 7" mini-ITX size M/B

Drive Bay :	External	5.25"	0
		3.5"	0
		3.5" hot-swap	0
		2.5" hot-swap	0
Internal	3.5"	1	
	2.5"	2	
Slim CD-Rom/DVD-Rom		1	
Slim FDD		0	

Temperature : 0°C(32°F) ~ 50°C(122°F)

Humidity : 5%~95% non-condensing

Gross Weight (lbs) : 7 kg / 15.4 lbs

Packaging Dimension (W x D x H) : mm : 470 x 560 x 160

Cubic Feet : 1.5

Reference Container Loading :	20'	700
	40'	1400
	40' H	1600

Riser Card Options : RCD-1U1PCI32R RCD-1U1PCI32RIB

Mounting Options :	BKT-1A-627-96020-G	BKT-1U-427-96010-G
	FRR-1U20-CR	FRR-1U26-C-R

Note: Please contact our sales rep for MB I/O shield option

Mechanical Drawing

