


RMC-2A-2

Applications
Internet Server (Web / Mail)
Firewall / VPN
File Server
Telephony / Telecom / VoIP
Network / Telecom Computers
Military Application

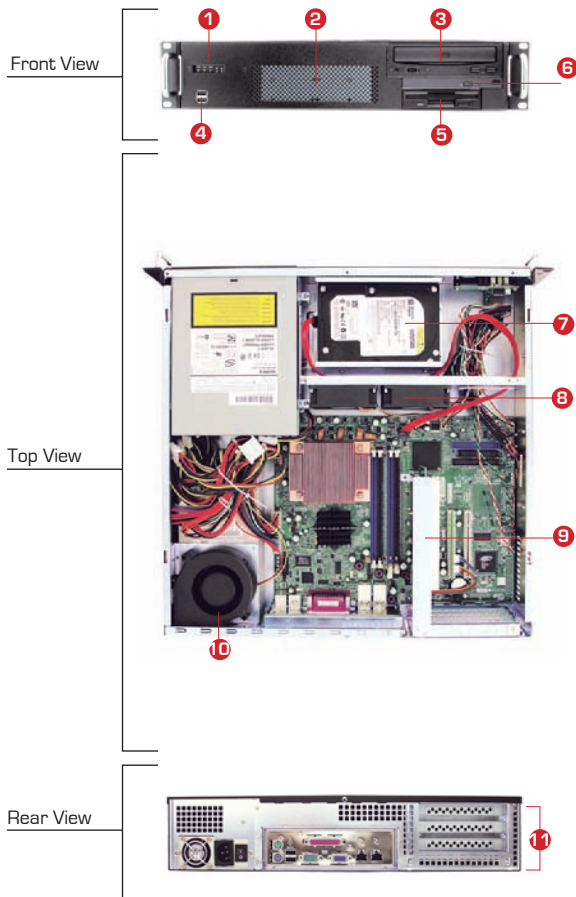

Features & Benefits	
1	Power on/off, system reset and LEDs for HDD & LAN
2	Superior cooling through front air intake
3	One(1) external 5.25-inch optical bay supported
4	Front access dual USB port
5	One(1) external 3.5-inch optical bay supported
6	One(1) external slim CD-ROM supported
7	Three(3) internal 3.5-inch HDD supported
8	Two(2) middle fans for optimized cooling
9	Riser card mounting bracket
10	One(1) rear 92mm blower for heat dissipation
11	Three(3) PCI slots via riser card

Model Number : RMC-2A-2	
Order Information : RMC-2A-●-2	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 431 x 88.2
	inches : 19 x 17 x 3.5
Cooling :	Middle: 2 x 80x25mm fans
	Rear: 1 x 97mm blower
Power Supply :	● Descriptions
	30X 300W ATX PFC
	35X 350W ATX PFC
Expansion : 3 x PCI slots via riser card (full height) or 7 x low profile PCI slots	
Controls : Power on/off and system reset + 2 x USB ports	
Indicators : Power, LAN, and HDD LEDs	
System Board : Up to 12"(W) x 9.6"(D) ATX compliant M/B	

Drive Bay :	External	5.25"	1
		3.5"	1
		3.5" hot-swap	0
	Internal	2.5" hot-swap	0
		3.5"	3
		Slim CD-Rom/DVD-Rom	1
		Slim FDD	0
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight (lbs) : 14 kgs / 30.8 lbs			
Packaging Dimension (W x D x H) :		mm : 580 x 590 x 240	
Cubic Feet : 3			
Reference Container Loading :	20'	350	
	40'	700	
	40' H	800	
Riser Card Options :	RCD-2U3PCI32	RCD-2U2PCI64	
	RCD-2U2PCI64REV	RCD-E161P2R-3	
Mounting Options :	BKT-2M-010-04400-G	FRR-1U26-C-R	
	SLR-20R	SLR-26	

Mechanical Drawing

