


RMC-2S-2

Applications

Internet Server (Web / Mail)

Firewall / VPN

File Server

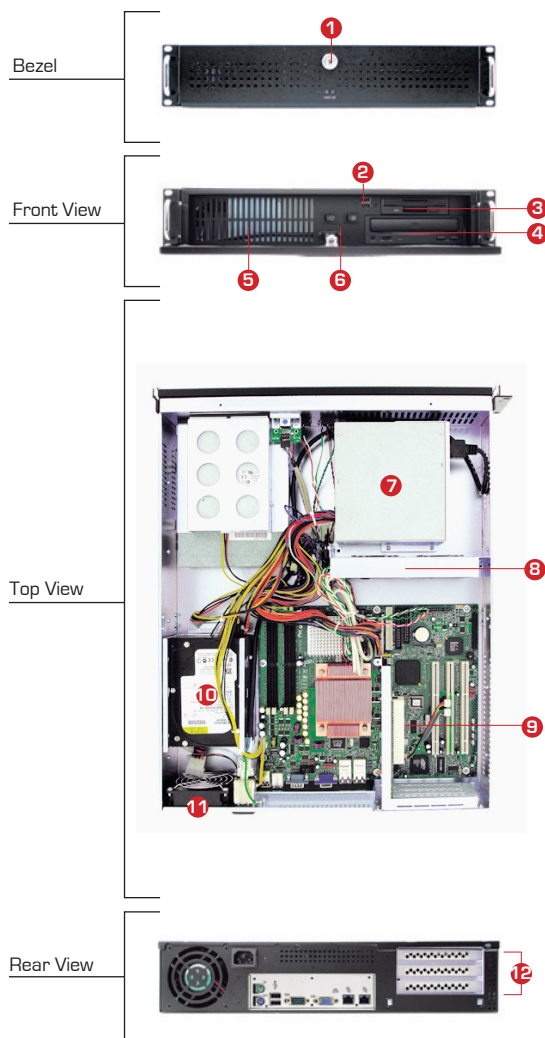

Features & Benefits

- 1 Front bezel with lock for data security and protection
- 2 Front access dual USB port
- 3 One(1) external 3.5-inch optical bay supported
- 4 One(1) external 5.25-inch optical bay supported
- 5 Superior cooling through front air intake
- 6 Power on/off, system reset and LEDs for HDD & LAN
- 7 PS/2 size power supply
- 8 Two(2) middle fans for optimized cooling
- 9 Riser card mounting bracket
- 10 Three(3) internal 3.5-inch HDD supported
- 11 One(1) rear fan for optimized cooling
- 12 Three(3) PCI slots via riser card

Model Number : RMC-2S-2		
Order Information : RMC-2S-●-2		
Industry Standard : EIA-RS310D		
Materials : Heavy-duty cold-rolled steel		
Finish :	Inside / Body : Zinc-plated with bright chromate	
	Outside / Front : Texture-coated	
Dimensions : (W x D x H)	mm : 482.6 x 532 x 88.2	
	inches : 19 x 21 x 3.5	
Cooling :	Middle: 2 x 80x25mm fans (80x32mm for MP version)	
	Rear: 1 x 80x25mm fan	
Power Supply :	●	Descriptions
	25X	250W ATX PFC
	30T	300W AT
	30X	300W ATX PFC
	46E	460W EPS PFC
Expansion : MB version: 3 x PCI slots via riser card (full height) BP version: 5 x slots		
Controls : Power on/off and system reset + 2 x USB ports		
Indicators : Power and HDD LEDs		
Speakers : 0.4W built-in		
System Board : Up to 12"(W) x 10.5"(D) ATX/SSI CEB compliant M/B or full-size SBC		

Drive Bay :	External	5.25"	1
		3.5"	1
		3.5" hot-swap	0
		2.5" hot-swap	0
	Internal	3.5"	3
		Slim CD-Rom/DVD-Rom	
Slim FDD		0	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 14 kgs / 30.5 lbs			
Packaging Dimension (W x D x H) :		mm : 580 x 700 x 230	
Cubic Feet : 3.3			
Reference Container Loading :	20'	315	
	40'	635	
	40' H	710	
Riser Card Options :	RCD-2U3PCI32		RCD-2U2PCI64
	RCD-E161P2R-3		
Mounting Options :	BKT-2M-010-04400-G		BKT-2S-010-24200-F
	SLR-20R		SLR-26R

Mechanical Drawing

