


# RMC-3F-0Q1

Applications
Database Server
Enterprise Storage Server
Medical Imaging
Digital Content Delivery
High-end Workstation

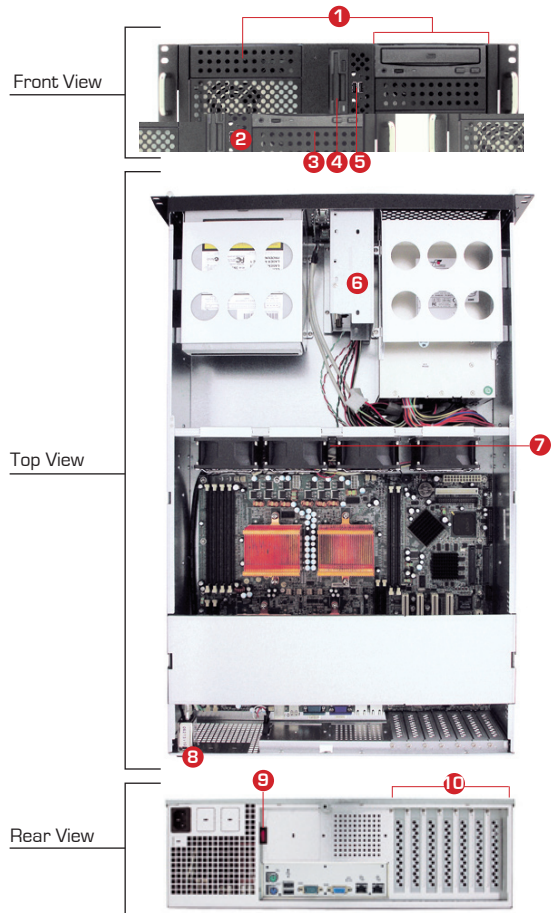

Features & Benefits	
1	Four(4) external 5.25-inch optical bays supported
2	Front access single or hot-swap redundant power supply (2+1 module) makes server maintenance at ease
3	Power on/off, system reset and LEDs for HDD & LAN
4	One(1) external 3.5-inch optical bay supported
5	Front access dual USB port
6	One(1) internal 3.5-inch HDD supported
7	Four(4) hot-swap middle fans for optimized cooling
8	Two(2) easy-swap rear fan for optimized cooling
9	Rear access power supply alarm reset
10	Seven(7) PCI slots attribute to network expansion and scalability

# RMC-3F-0Q1

Model Number : RMC-3F-0Q1	
Order Information : RMC-3F-●-0Q1	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty preplated SPGC cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture coated
Dimensions : (W x D x H)	mm : 482.6 x 695 x 133.35
	inches : 19 x 27 x 5.25
Cooling :	Middle: 4 x 80x32mm ball-bearing fans (optional 80x38mm upgrade)
	● Descriptions
Power Supply :	75R 750W 2+1 hot-swap redundant PFC
	80E 800W EPS-12V PFC
Expansion : 7 x PCI slots (full height, full length)	
Controls : Power on/off and system reset + 2 x USB ports	
Indicators : Power, LAN and HDD LED's	
System Board : 16"(W) x 13"(D) Tyan® S4985™ Quad Opteron™ M/B or 16"(W) x 14"(D) Iwill® QK8S™ Quad Opteron™ M/B	

Drive Bay :	External	5.25"	4
		3.5"	1
		3.5" hot-swap	0
		2.5" hot-swap	0
Internal	3.5"	1	
	Slim CD-Rom/DVD-Rom	0	
	Slim FDD	0	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 18 kgs / 39.6 lbs			
Packaging Dimension (W x D x H) :		mm : 580 x 850 x 300	
Cubic Feet : 5.2			
Reference Container Loading :	20'	200	
	40'	400	
	40' H	450	
Mounting Options :	BKT-2M-010-04400-G	BKT-2S-010-24200-F	
	SLR-26		

## Mechanical Drawing

