

RMC-4A-2


Applications

Internet Server (Web / Mail)

CCTV Surveillance DVR

Military Application

Industrial / Telecom Computers

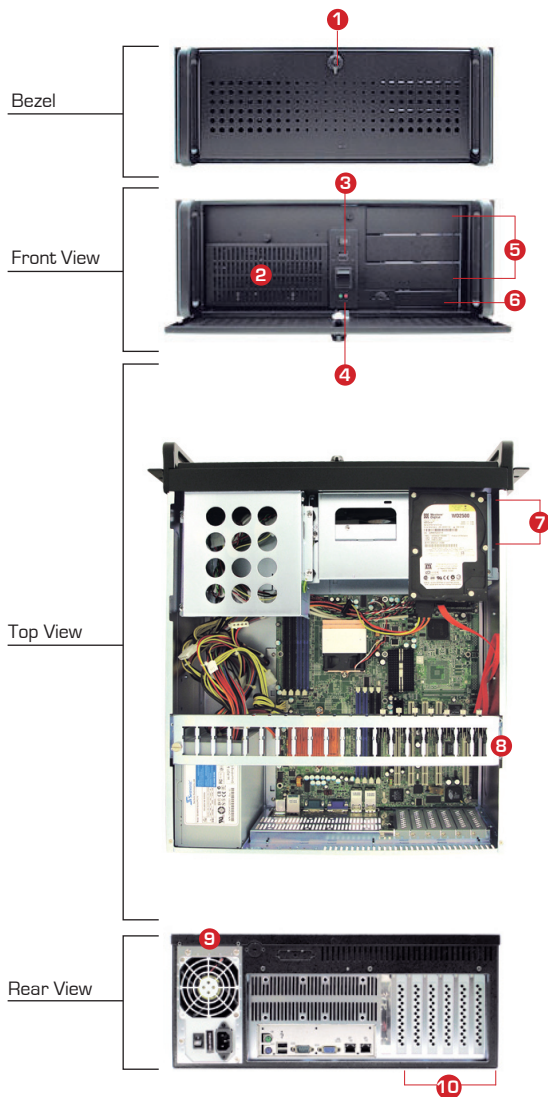

Features & Benefits

- 1 Front bezel with lock for data security and protection
- 2 Removable & washable air filter for dust-free server interior Superior cooling through front air intake
- 3 Front access dual USB port
- 4 Power on/off, system reset and LEDs for HDD & PWR
- 5 Three(3) external 5.25-inch bays supported
- 6 One(1) external 3.5-inch bay supported
- 7 One(1) internal 3.5-inch HDD supported
- 8 Hold down bar to ensure that HBA cards are locked into positions
- 9 Single or redundant power supply option
- 10 Seven(7) PCI slots for MB version

Model Number : RMC-4A-2	
Order Information : RMC-4A-●-2▲	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 450 x 177
	inches : 19 x 17.7 x 7
Cooling :	Front: 2 x 92mm ball-bearing fans (+ optional 2 x 60mm exhaust fans)
	● Descriptions
Power Supply :	30T 300W AT
	30X 300W ATX PFC
	35E 350W EPS-12V PFC
	40E 400W EPS-12V PFC
	40R 400W hot-swap redundant PFC
	46E 460W EPS-12V PFC
50R 500W hot-swap redundant PFC	
Expansion : MB Version: 7 x PCI slots (full height) BP Version: 14 x slots	
Controls : Power on/off, system reset, and dual USB port	
Indicators : Power and HDD LEDs	

System Board :	▲ Descriptions		
	MB Version: 12"(W) x 9.6"(D) ATX/SSI EEB 3.6 compliant M/B		
Drive Bay :	B1	BP Version: (SBC) 14-slot	
	External	5.25"	3
		3.5"	1
		3.5" hot-swap	0
		2.5" hot-swap	0
	Internal	3.5"	2 (+2 optional)
Slim CD-Rom/DVD-Rom		0	
Slim FDD		0	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Packaging Dimension (W x D x H) :		mm : 580 x 620 x 340	
Cubic Feet : 4.3			
Reference Container Loading :	20'	238	
	40'	477	
	40' H	545	
Mounting Options :	BKT-2M-010-04400-G	BKT-2S-010-24200-F	
	SLR-20	SLR-26	

Mechanical Drawing

