


# RMC-4L-2

Applications
File Server
Virtual Tape Library
NAS / iSCSI
Telephony / Telecom / VoIP
High-end Workstation
Industrial / Telecom Computers

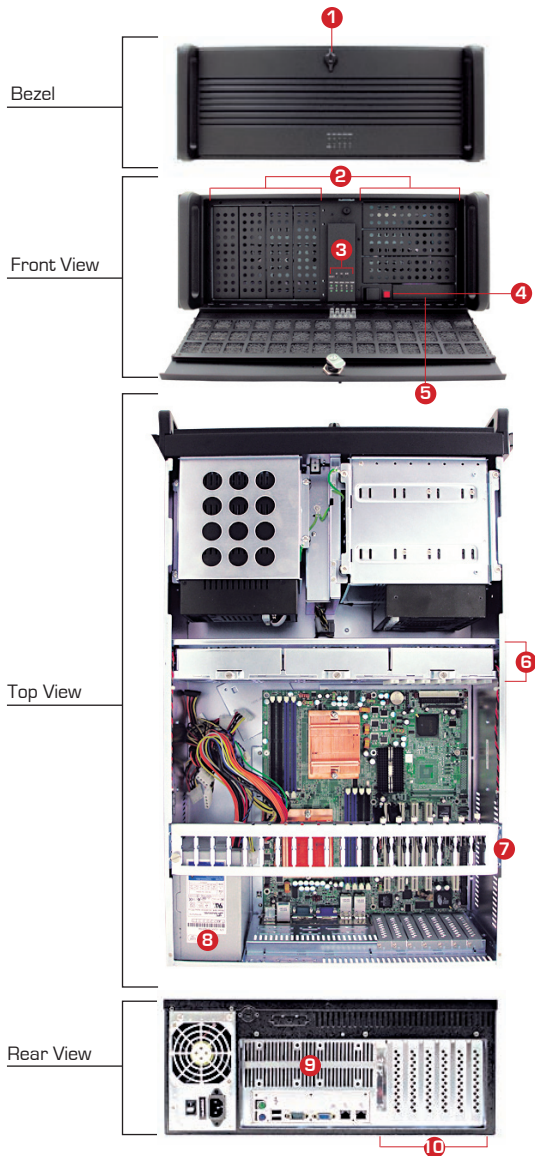

## Features & Benefits

- 1 Front bezel with lock for data security and protection
- 2 MB version: Seven(7) external 5.25-inch optical bays supported  
SBC version: Three(3) external 5.25-inch optical bays supported
- 3 Environmental monitoring board
- 4 Front access power supply alarm reset
- 5 One(1) external 3.5-inch bay supported
- 6 Three(3) hot-swap 120mm middle fans for optimized cooling
- 7 Hold down bar to ensure that HBA cards are locked into positions
- 8 PS/2 size single or redundant power supply options
- 9 Two(2) rear fan slots for upgrade
- 10 Seven(7) PCI slots attribute to network expansion and scalability

Model Number : RMC-4L-2		
Order Information : RMC-4L-●-2▲		
Industry Standard : EIA-RS310D		
Materials : Heavy-duty cold-rolled steel		
Finish :	Inside / Body : Zinc-plated with bright chromate	
	Outside / Front : Texture-coated	
Dimensions : (W x D x H)	mm : 482.6 x 676.2 x 177	
	inches : 19 x 27 x 7	
Cooling :	Middle: 3 x 120mm hot-swap ball-bearing fans (+ optional 2 x 60x25mm fans)	
Power Supply :	● Descriptions	
	30X	300W ATX PFC
	30R	300W ATX hot-swap redundant PFC
	40E	400W EPS-12V PFC
	40R	400W hot-swap redundant PFC
	46E	460W EPS-12V PFC
	46R	460W hot-swap redundant PFC
	60E	600W EPS-12V PFC
65R	650W hot-swap redundant PFC	
Expansion : MB version: 7 x PCI slots (full height, full length) BP version: 20 x slots		
Controls : Two CPU and one alarm reset buttons, power on/off		
Indicators : 2 x power, 1 x system fan, 1 x CPU fan, 1 x temperature sensor and 5 x HDD LEDs		

System Board :	▲	Descriptions	
		MB Version: 12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant MB	
	B1	BP Version: (SBC) 14-slot	
	B2	BP Version: (SBC) 20-slot	
External	5.25"	7 (MB Version) 3 (BP Version)	
	3.5"	1 (MB & BP Version)	
	3.5" hot-swap	0	
	2.5" hot-swap	0	
Drive Bay :	3.5"		
	Internal	Optional 2 x 3.5" HDD bays for MB version (HRP space can be converted to 4 x 5.25" or 6 x 1" SCSI/SATA hot-swap drives)	
	Slim CD-Rom/DVD-Rom	0	
	Slim FDD	0	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight (lbs) : 24.5 kgs / 53.9 lbs			
Packaging Dimension (W x D x H) :		mm : 590 x 850 x 330	
Cubic Feet : 5.9			
Reference Container Loading :	20'	175	
	40'	355	
	40' H	395	
Mounting Options :	BKT-2M-010-04400-G	BKT-2S-010-24200-F	
	SLR-26		

## Mechanical Drawing

