


# RMC-4S-2

Applications
Internet Server (Web / Mail)
File Server
NAS / iSCSI
Military Application
Industrial / Telecom Computers

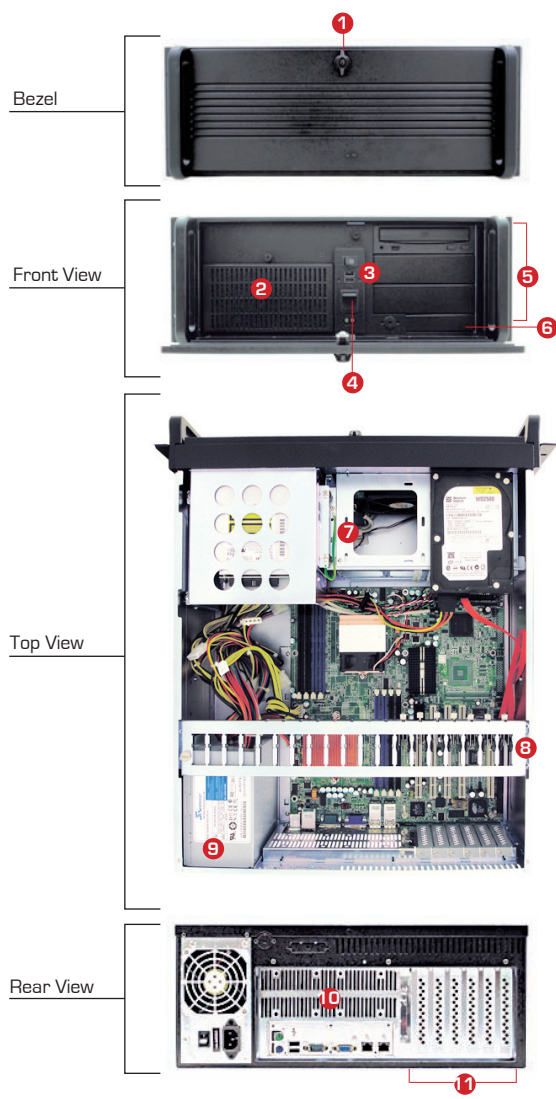

## Features & Benefits

- 1 Front bezel with lock for data security and protection
- 2 Removable & washable air filter for dust-free server interior Superior cooling through front air intake
- 3 Front access dual USB port
- 4 Power on/off, system reset and LEDs for HDD & LAN
- 5 Three(3) external 5.25-inch bays supported
- 6 One(1) external 3.5-inch bay supported
- 7 Two(2) internal 3.5-inch HDD supported
- 8 Hold down bar to ensure that HBA cards are locked into positions
- 9 PS/2 size single or redundant power supply options
- 10 Two(2) rear fan slots for upgrade
- 11 Seven(7) PCI slots attribute to network expansion and scalability

Model Number : RMC-4S-2		
Order Information : RMC-4S-●-2▲		
Industry Standard : EIA-RS310D		
Materials : Heavy-duty cold-rolled steel		
Finish :	Inside / Body : Zinc-plated with bright chromate	
	Outside / Front : Texture-coated	
Dimensions : (W x D x H)	mm : 482.6 x 505 x 177	
	inches : 19 x 20 x 7	
Cooling :	Front: 2 x 90mm fans (+ optional 2 x 60x25mm fans for exhaust)	
Power Supply :	● Descriptions	
	30T	300W AT
	30X	300W ATX PFC
	35E	350W EPS-12V PFC
	40E	400W EPS-12V PFC
	46E	460W EPS-12V PFC
	40R	400W hot-swap redundant PFC
50R	500W hot-swap redundant PFC	
Expansion : MB version: 7 x PCI slots (full height, full length) or BP version: 14 x slots		
Controls : Power on/off, system reset and dual USB ports		
Indicators : Power and HDD LEDs		
Speakers : 0.4W built-in		

System Board:	▲	Descriptions	
		MB Version: Up to 12"(W) x 10.5"(D) size ATX/SSI CEB compliant M/B (Optional 12"(W) x 13"(D) ATX/SSI EEB 3.6 compliant M/B)	
	B1	BP Version: (SBC) 14-slot	
	B2	BP Version: (SBC) 20-slot	
Drive Bay :	External	5.25"	3
		3.5"	1
		3.5" hot-swap	0
		2.5" hot-swap	0
	Internal	3.5"	2 (+ optional 2 x 3.5" HDD)
	Slim CD-Rom/DVD-Rom		0
Slim FDD		0	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight (lbs) : 18 kgs / 39.6 lbs			
Packaging Dimension (W x D x H) :		mm : 600 x 690 x 340	
Cubic Feet : 5			
Reference Container Loading :	20'	210	
	40'	420	
	40' H	470	
Mounting Options :	BKT-2M-010-04400-G	BKT-2S-010-24200-F	
	SLR-20	SLR-26	

## Mechanical Drawing

