

RMC-5L-2


Applications

File Server

Virtual Tape Library

Telephony / Telecom / VoIP

Industrial / Telecom Computers

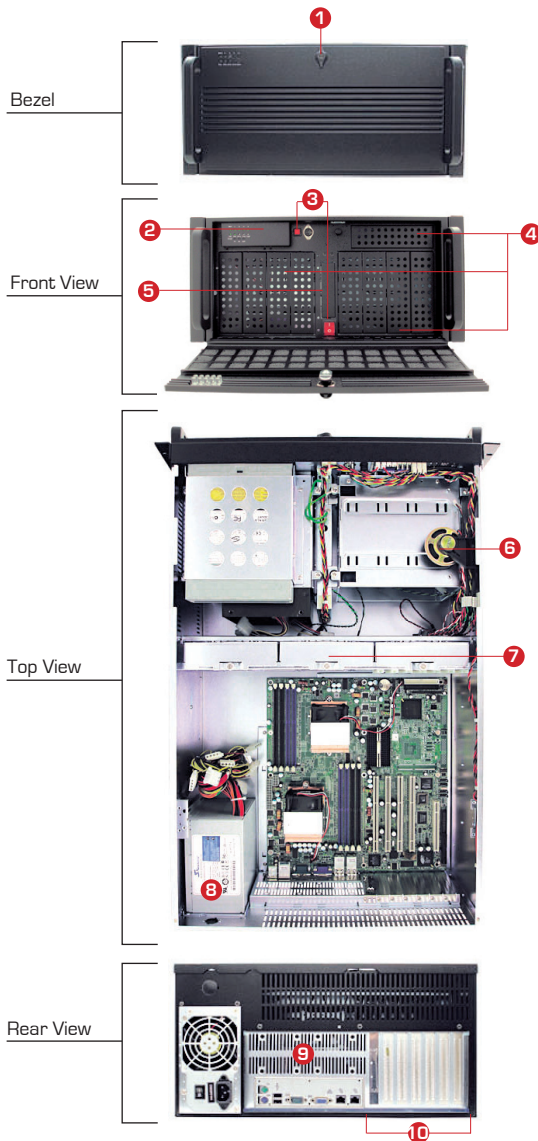

Features & Benefits

- ① Front bezel with lock for data security and protection
- ② Environment monitoring board
- ③ Front access keyboard
- ④ Five(5) external 5.25-inch bays supported
- ⑤ One(1) external 3.5-inch bay supported
- ⑥ Optional two(2) 3.5-inch bay for ATX version
- ⑦ Three(3) hot-swap 120mm middle fans for optimized cooling
- ⑧ PS/2 size single and redundant power supply
- ⑨ Two(2) rear fan slots for upgrade
- ⑩ Seven(7) PCI slots (or twenty(20) PCI slots for SBC Version) attribute to network expansion and scalability

Model Number : RMC-5L-2	
Order Information : RMC-5L-●-2▲	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 676.2 x 221.6
	inches : 19 x 27 x 8.75
Cooling :	Middle: 3 x 120mm hot-swap ball-bearing fans
	Rear: (+ optional 2 x 60mm fans for MB version)
Power Supply :	● Descriptions
	30X 300W ATX PFC
	40E 400W EPS-12V PFC
	46E 460W EPS-12V PFC
	30R 300W ATX hot-swap redundant PFC
	40R 400W hot-swap redundant PFC
	46R 460W hot-swap redundant PFC
	50R 500W hot-swap redundant PFC
	65R 650W hot-swap redundant PFC
Expansion : MB version: 7 x PCI slots (full height, full length) or BP version: 20 x slots	
Controls : 2x system and 1x buzzer reset buttons, power on/off	
Indicators : 2 x power, 1 x system fan, 1 x CPU fan, 1 x temperature sensor and 5 x HDD LEDs	

System Board :	▲	Descriptions		
		MB Version: Up to 12"(W) x 13"(D) E-ATX/ SSI EEB 3.6 compliant M/B		
	B2	BP Version: (SBC) 20-slot		
Drive Bay :	External	5.25"		5
		3.5"		1
		3.5" hot-swap		0
		2.5" hot-swap		0
	Internal	3.5"	Optional 2 for MB version	
	Slim CD-Rom/DVD-Rom		0	
	Slim FDD		0	
Temperature : 0°C(32°F) ~ 50°C(122°F)				
Humidity : 5%~95% non-condensing				
Gross Weight (lbs) : 26 kgs / 57.2 lbs				
Packaging Dimension (W x D x H) :			mm : 590 x 840 x 380	
Cubic Feet : 6.7				
Reference Container Loading :	20'	155		
	40'	310		
Mounting Options :	BKT-2M-010-04400-G		BKT-2S-010-24200-F	
	SLR-26			

Mechanical Drawing

