


RSA-1DD2-2

Applications

Internet Server (Web / Mail)

NAS / iSCSI

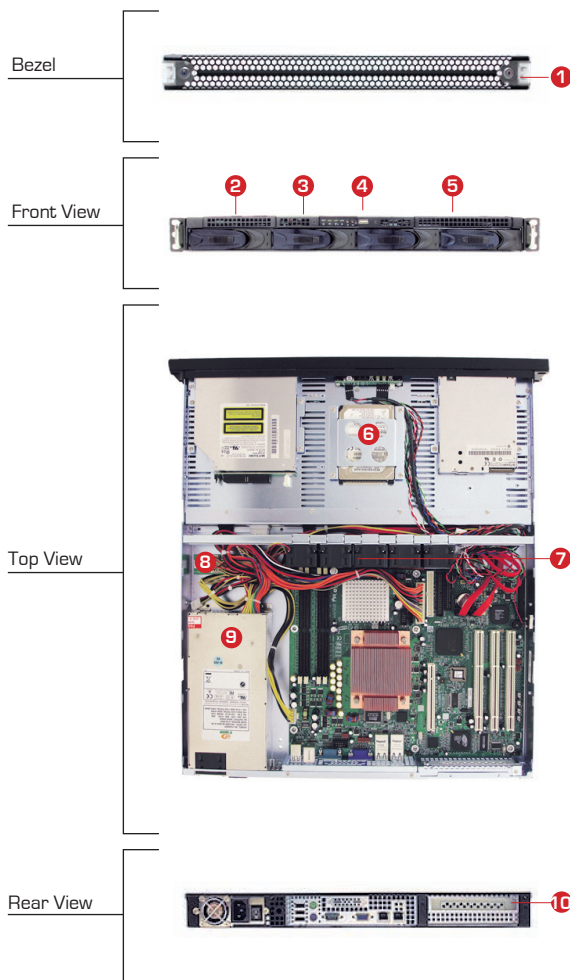

Features & Benefits

- 1 Front bezel for data security and protection
- 2 One(1) external slim floppy drive supported
- 3 Power on/off, system reset and LEDs for HDD & LAN
- 4 Front access USB port
- 5 One(1) external slim CD-ROM supported
- 6 One(1) internal 2.5-inch HDD supported
- 7 Five(5) hot-swap middle fans for optimized cooling
- 8 One(1) 6-port fan board to simplify fan cabling
- 9 1U ATX form factor power supply
- 10 One(1) PCI slots via riser card

RSA-1DD2-2

Model Number : RSA-1DD2-2	
Order Information : RSA-1DD2-●■-2	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 513.3 x 44
	inches : 19 x 20 x 1.75
Cooling :	Middle : 5 x 40x28mm fans
Power Supply :	● Descriptions
	30X 300W ATX-12V 40X 400W ATX-12V
Expansion : 1 x PCI slot via riser card (full height, full length)	
Controls : Power on/off and system reset + USB port	
Indicators : Power, LAN and HDD LEDs	
System Board : 12"(W) x 9.6"(D) ATX size M/B	

Drive Bay :	External	5.25"	0
		3.5" hot-swap	4
		2.5" hot-swap	0
	Internal	2.5"	1
		Slim CD-Rom/DVD-Rom	1
	Slim FDD	1	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 18kg / 39.6lbs			
Packaging Dimension (W x D x H) :		mm : 590 x 700 x 190	
Cubic Feet : 2.8			
Reference Container Loading :	20'	375	
	40'	750	
	40' H	857	
Backplane :	■ Descriptions		
	SS2	Serial ATA	
	SC3	Parallel SCSI	
Mounting Options :	FRR-FR20-TW-R (included)		

Note: Please contact our sales rep for MB I/O shield option

Mechanical Drawing

