


# RSA-2ED2-2

Applications
Database Server
File Server
Enterprise Storage Server
Near-line Storage Server
Virtual Tape Library
NAS / iSCSI
CCTV Surveillance DVR
Medical Imaging Server
Digital Content Delivery (DCD)

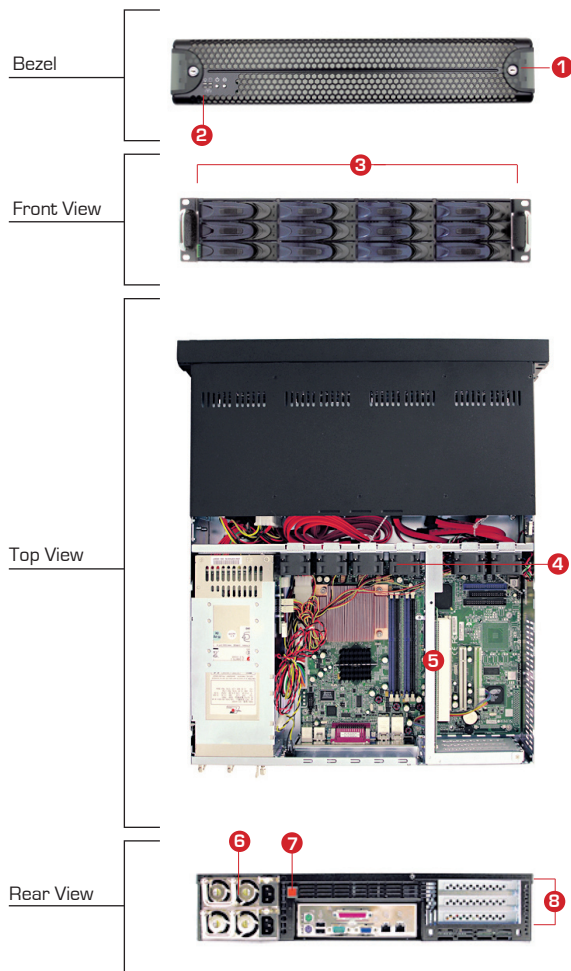

Features & Benefits	
<b>1</b>	Front bezel for data security and protection
<b>2</b>	Power on/off, system reset and LEDs for HDD & LAN
<b>3</b>	Twelve(12) external 3.5-inch hot-swap HDD supported
<b>4</b>	Six(6) hot-swap middle fans for optimized cooling
<b>5</b>	Riser card mounting bracket
<b>6</b>	(optional) Hot-swap redundant power supply (2+1 module) maximizes server protection
<b>7</b>	Rear access power supply alarm reset
<b>8</b>	Three(3) PCI slots via riser card

Model Number : RSA-2ED2-2	
Order Information : RSA-2ED2-●■-2	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 513.5 x 88
	inches : 19 x 20 x 3.5
Cooling :	Middle : 6 x 40x28mm fans
Power Supply :	● Descriptions
	40X 400W ATX-12V HRP
Expansion : 3 x PCI slots via riser card (full height, full length) 7 x low profile PCI slots	
Controls : Power on/off and system reset on front bezel	
HDD LEDs for power, activity and failure	
System Board : 12"(W) x 9.6"(D) ATX size M/B	

Drive Bay :	External	5.25"	0
		3.5" hot-swap	12
		2.5" hot-swap	0
	Internal	2.5"	1
		Slim CD-Rom/DVD-Rom	0
	Slim FDD	0	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 15kg / 33lbs			
Packaging Dimension (W x D x H) :		mm : 590 x 700 x 240	
Cubic Feet : 3.5			
Reference Container Loading :	20'	300	
	40'	600	
	40' H	685	
Backplane :	■ Descriptions		
	SS2	Serial ATA	
	SC3	Parallel SCSI	
Mounting Options :	FRR-FR20-TW-R (included)		

## Mechanical Drawing

